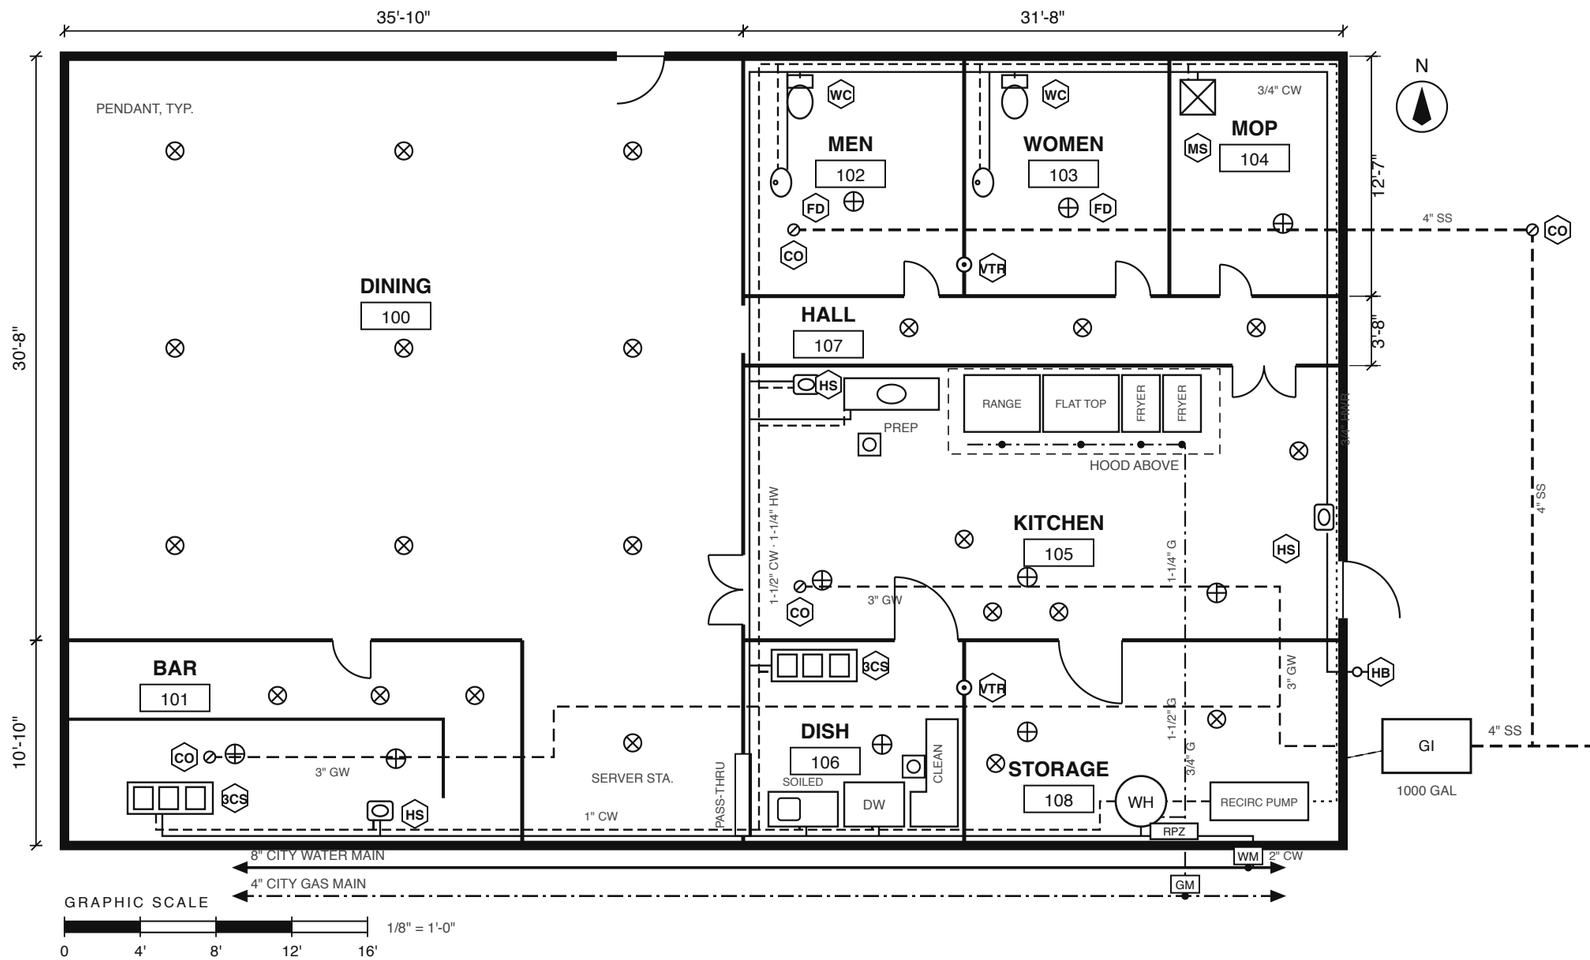


PLUMBING KEYNOTES

WC WATER CLOSET, FLOOR MTD
HS HAND SINK, WALL HUNG
3CS 3-COMPARTMENT SINK
MS MOP SINK, FLOOR MTD
FD FLOOR DRAIN W/ TRAP
PRIMER, TYP.
FS FLOOR SINK, 1/2 GRATE
DW COMMERCIAL DISHWASHER,
INDIRECT WASTE TO FS
GI GREASE INTERCEPTOR,
1000 GAL, EXTERIOR
WH WATER HEATER, 100 GAL GAS
RP RECIRC PUMP ON THE HW RETURN
SS SANITARY SEWER TO CITY
W DOMESTIC WATER FROM CITY
G GAS SERVICE FROM CITY
RPZ BACKFLOW PREVENTER, RPZ
HB HOSE BIBB, FREEZEPROOF
CO CLEANOUT
VTR VENT THROUGH ROOF

ALL KITCHEN WASTE THROUGH GREASE INTERCEPTOR, TYP.

GENERAL NOTES

WATER: TYPE L COPPER. GAS: SCH 40 BLACK STEEL, THREADED.
WASTE AND VENT: PVC DWV SCH 40, BELOW SLAB AND IN WALLS.
SLOPE WASTE 1/4" PER FT TO 2-1/2", 1/8" PER FT AT 3" AND UP.
CLEANOUTS AT EACH UPSTREAM END, EACH TURN, 100 FT MAX APART.
EVERY FIXTURE TRAPPED AND VENTED. VENTS THROUGH ROOF AT VTR.
RESTROOM WASTE DIRECT TO SEWER. KITCHEN AND BAR WASTE VIA GI.

LEGEND

- CW DOMESTIC COLD WATER
- HW DOMESTIC HOT WATER
- HWR HOT WATER RETURN
- G GAS
- SS SANITARY SEWER
- GW GREASE WASTE TO GI
- GAS DROP W/ SHUTOFF, TYP.
- LIGHT FIXTURE, TYP.

COUNTTOOLING — SAMPLE PLAN

PROJECT MAIN ST RESTAURANT	SHEET 1
SCALE 1/8" = 1'-0"	DATE 07/31/26
PLUMBING PLAN	DRAWN: CT
	P-101